


Horizon Digital Terrestrial Meter

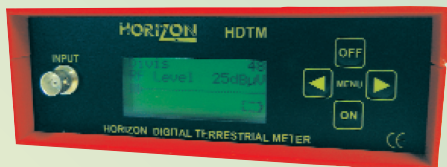

HDTM

The HDTM is the DVB-T antenna installer's tool of choice making digital terrestrial installation simple and accurate.

DVB-T transmitters are quickly found either using the default step through mode (UHF 21 to 69) or by downloading the digital transmitters available for your regions from the Horizon Global Electronics web site.

A Pass / Fail COFDM indicator makes diagnostics of DVB-T signal digital quality easy.

The HDTM is easy to carry and use at heights weighing less than a kilo.

Specification:

- Displays Signal Strength (RF level) and Pre and Post BER together
- Fast and accurate Pre BER real time measurement
- Built in COFDM signal quality indicator
- Up to 32 stored transmitters (via website download)
- Audible signal indicator
- back lit LCD display
- VHF (Band III) and UHF bands
- RF input range 167-862 MHz
- Input dynamic range -72dBm ~ -20dBm
- Input connector BNC. Input impedance 75 ohms
- Built in universal charger 100 - 240 V AC
- Intelligent charger with fast charge and trickle charge modes
- Minimum of 5 hours from 2.4 mAh Ni-MH battery (fully charged)
- Supplied with leather case, mains lead, programming lead and in car charger
- IEC to BNC adapter and 10dB attenuators included

HORIZON

For a reliable solution!

www.horizonhge.com

Horizon Global Electronics Ltd
Unit 3 West Side, Flex Meadow
Harlow, Essex, CM19 5TJ

T: +44 (0) 1279 417005
F: +44 (0) 1279 417025
E: sales@horizonhge.com

